



HT50KX-25

FEATURES

- 8,000 LB Maximum Lifting Capacity
- 50,000 FT-LB Moment Rating
- Only available as Proportional
- Fully Hydraulic Power
- Hexagonal Boom Construction
- Fully Hydraulic Boom Extension 12' – 25' FT
- High Speed Winch: 60 FT/min.
- 400° Power Rotation
- Meets ANSI B30.5 Safety Standards
- Meets OSHA 1910.180 Requirements

STANDARD EQUIPMENT

- Capacity Overload Shut-Off System
- Anti-Two-Blocking System
- 100 FT of 3/8" Aircraft-Quality Wire Rope
- Remote Control Pendant: 25 FT Cord and Quick Disconnect
- Load Block with Swivel Hook Safety Latch


MINIMUM REQUIREMENTS

- 20,500 LB GVWR Chassis
- Outriggers: Front and Rear
- PTO, Pump and Reservoir
- Hydraulic Requirements: 12 GPM, 25 GAL Reservoir

OPTIONAL EQUIPMENT

- Radio Remote Controls
- Hydraulic and Manual Outrigger Packages
- Hydraulic Pumps and Reservoirs
- Mounting Pedestal for Platform Bodies
- Boom Rests

LIFTING CAPACITIES	
REACH (FT.)	CAPACITY (LBS.)
6	8,000
12	4,200
18.5	2,675
24.8	2,000

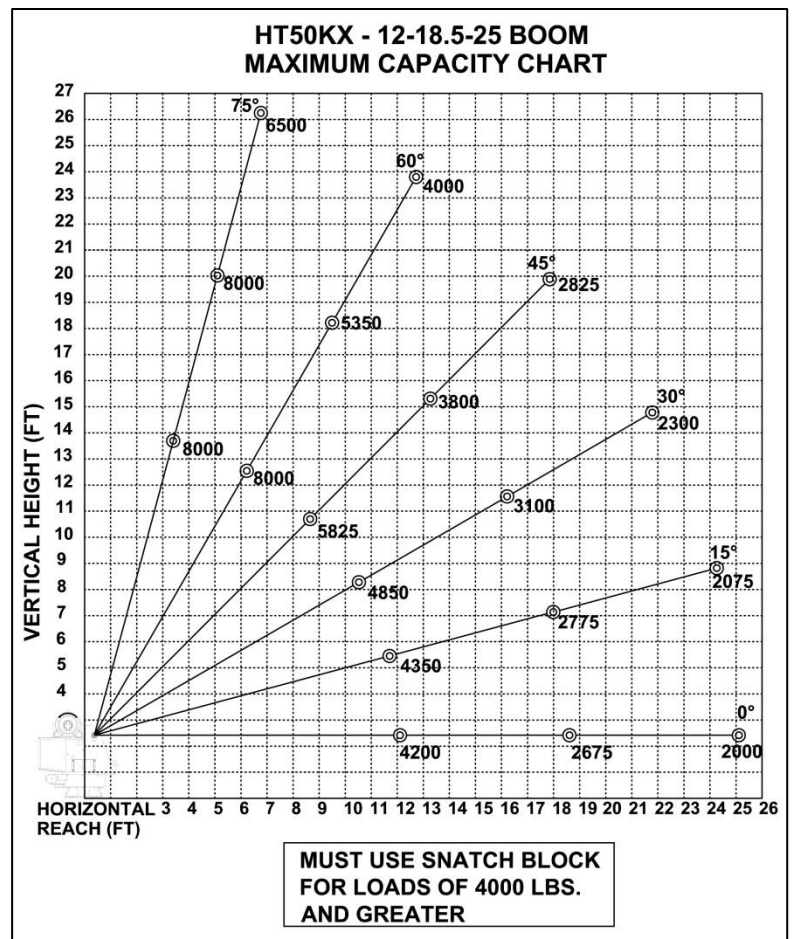

12110 Best Place | Cincinnati, Ohio 45241 | 800-226-2238 | 513-772-8446
info@venturo.com | www.venturo.com

