



RUGGED. RELIABLE. REAL.

ET12K

FEATURES

- 3,500 LB Maximum Lifting Capacity
- 12,000 FT-LB Moment Rating
- Electric - Hydraulic Power
- Manual Boom Extension 7-11 FT
- Manual Boom Extension 11-15 FT
- Continuous Power Rotation
- Meets ANSI B30.5 Safety Standards
- Meets OSHA 1910.180 Requirements

LIFTING CAPACITIES	
REACH (FT.)	CAPACITY (LBS.)
4	3,500
7	1,800
11	1,100
15	800

STANDARD EQUIPMENT


- Capacity Overload Shut-Off System
- Anti-Two-Blocking System
- 65 FT of 1/4" Aircraft-Quality Wire Rope
- Remote Control Pendant: 25 FT Cord and Quick Disconnect
- Load Block with Swivel Hook Safety Latch
- Master Disconnect Switch
- Battery Cable: 25 FT

MINIMUM REQUIREMENTS

- 8,800 LB GVWR Chassis
- Outriggers
- Electric Power Source: 12V DC

OPTIONAL EQUIPMENT

- Radio Remote Controls
- Electric/Hydraulic and Manual Outrigger Packages
- Mounting Pedestal for Platform Bodies
- Boom Rests
- Cable Overhaul Weight

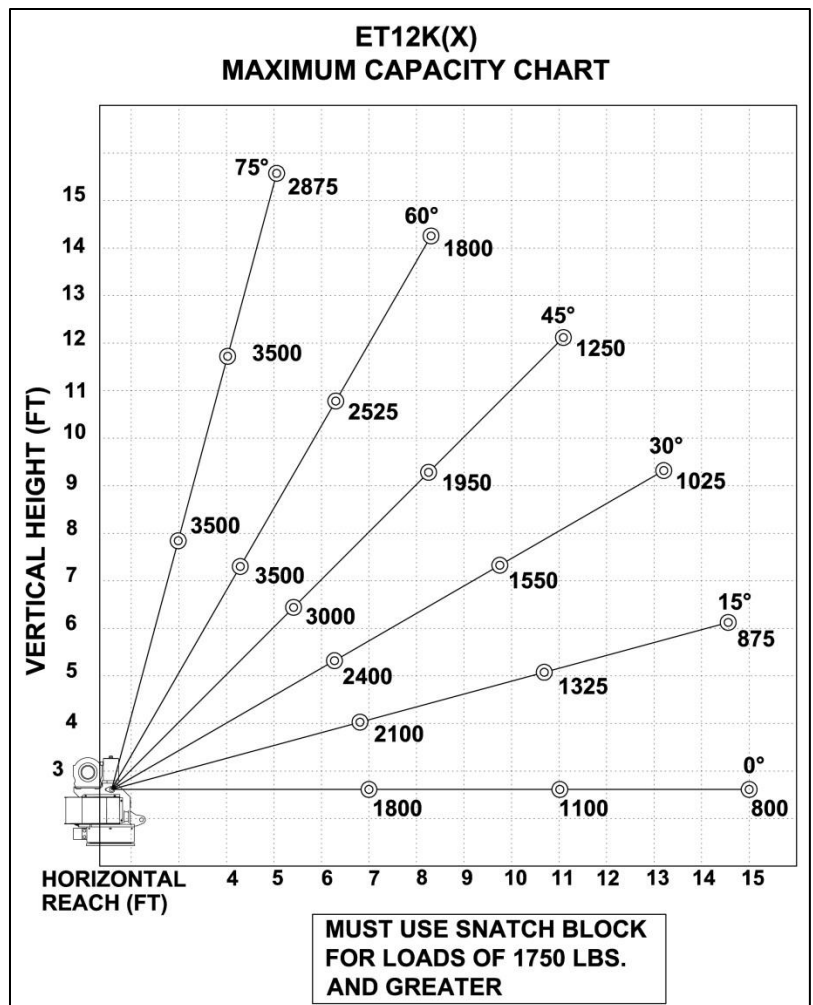

12110 Best Place | Cincinnati, Ohio 45241 | 800-226-2238 | 513-772-8446

info@venturo.com | www.venturo.com

